


ECO-WHEEL TRACK™

Mounting Instructions



1 Each pair of tracks is delivered in four sections, complete with 2 tightening tools, 8 long track locks, 16 short track locks, and installation instructions.

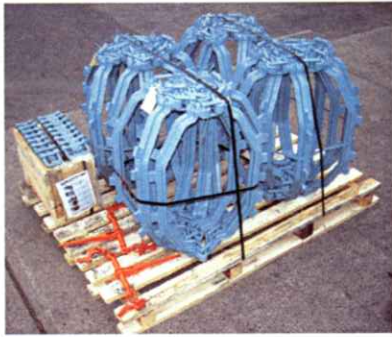

2 Layout two sections of track with the top of the cross members facing up. Use one section with track locks and one without. Make sure the track locks are in the center. Join the two sections using long track locks. Install the track lock with the cap on the tire side. Install the fasteners so that the locknut is on the inside of the link system.



3 Connect a long chain to the center of the cross member at one end.




4 Position the machine so that the wheel is lined up with the track. Wrap the chain around the center of the tire and place the loose end of the chain on the ground in front of the tire.



5 Pull the track around the top of the tire by driving over the chain. Ensure track is centered over the tire as it is rolled on.



Position the track so the loose ends are near the ground. Install a track tightening tool on each side of the track.

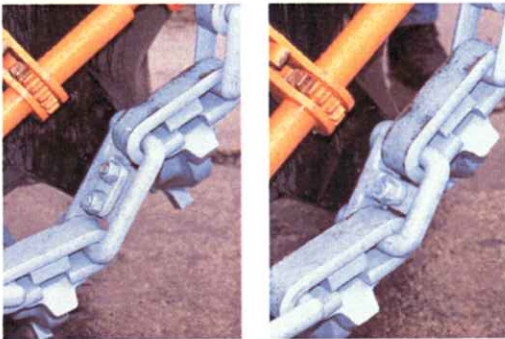

Tighten the track until a track lock can be installed. Depending on the fit and tires, use either a short or long track lock.



Install the track lock with the cap on the tire side and with the fastener lock nut to the inside of the link system.



At this point the track should be tightened as tight as possible. It may be necessary to replace one or more of the long track locks with short locks. If it is necessary to remove a cross member, remove one of the fixed ones with a torch. It can always be installed later if necessary using the short track locks supplied. This will ensure always having 4 track locks in place for future adjustments.



Always keep the tracks as tight as possible on the tires. During the first days of operation, the paint and any rough surfaces in the link system will wear smooth requiring the tracks to be re-tightened. Keep tires inflated to the maximum allowable pressure recommended by the tire manufacturer.